



n/a  
energy class

55  
lumens/watt

## Emergency Downlight

Emergency Downlight G1 TU 3 HL O Li  
N

93100228

---

### Product information

The Emergency Downlighter consists of an LED lamphead with integrated battery, status indicator LED and an emergency lighting unit to operate the single LED in maintained and non-maintained mode. The optically efficient lenses ensure optimum performance for corridor or open area applications. The safety-compliant downlight emergency lighting is for recessed mounting and ensures emergency escape route lighting in buildings. The integrated selftest function corresponds the European standard.

---

## Product data

DIALux description	TUNGSRAM - Emergency Downlight - 165lm - 3W - 6000K - 93100228[SKU] - Recessed
Brand	TUNGSRAM
Mounting type	Recessed
Weight [kg]	0.233
Body color	White
Product dimensions (Length) x (Width) x (Height) [mm]	ø60x83mm (head)
Certifications	CE

## Performance data

Rated efficacy [lm/W]	55
IP Rating	20
Rated power [W]	3
Nominal lumens [lm]	165
Rated lumens [lm]	165
Ambient Temperature [°C]	+5°C to +50°C

## Photometrical data

Nominal correlated colour temperature (CCT) [K]	6000
Nominal beam angle [°]	100°


## Electrical data

IEC protection class	Class II
Operating voltage [V]	220-240V
Nominal lamp power factor	0.5

## Logistic data

Box quantity	1
Shipment	Standard
Product status	Available

## Light distribution

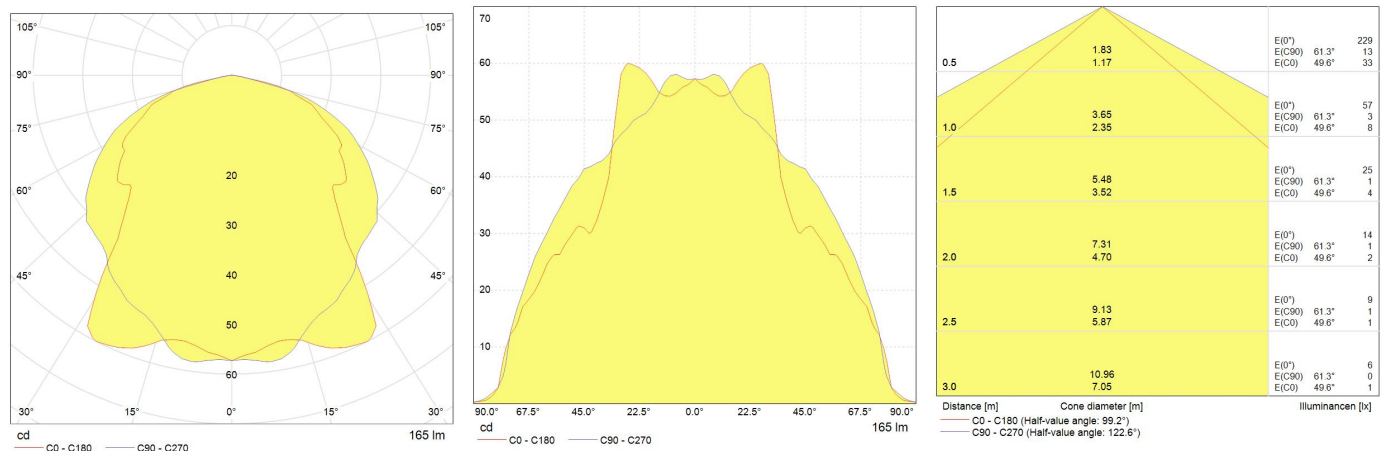

## Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Datasheet \(PDF\)](#)

[Installation guide \(PDF\)](#)

[Images \(HTTP\)](#)

[Declaration of Conformity \(PDF\)](#)