



n/a
energy class

55
lumens/watt

Emergency Downlight

Emergency Downlight G1 TU 3 HL C Li
D

93100233

Product information

The Emergency Downlighter consists of an LED lamphead with integrated battery, status indicator LED and an emergency lighting unit to operate the single LED in maintained and non-maintained mode. The optically efficient lenses ensure optimum performance for corridor or open area applications. The safety-compliant downlight emergency lighting is for recessed mounting and ensures emergency escape route lighting in buildings. The integrated selftest function corresponds the European standard.

Product data

DIALux description	TUNGSRAM - Emergency Downlight - 165lm - 3W - 6000K - 93100233[SKU] - Recessed
Brand	TUNGSRAM
Mounting type	Recessed
Weight [kg]	0.233
Body color	White
Product dimensions (Length) x (Width) x (Height) [mm]	ø60x83mm (head)
Certifications	CE

Performance data

Rated efficacy [lm/W]	55
IP Rating	20
Rated power [W]	3
Nominal lumens [lm]	165
Rated lumens [lm]	165
Ambient Temperature [°C]	+5°C to +50°C

Photometrical data

Nominal correlated colour temperature (CCT) [K]	6000
Nominal beam angle [°]	110°


Electrical data

IEC protection class	Class II
Operating voltage [V]	220-240V
Nominal lamp power factor	0.5

Logistic data

Box quantity	1
Shipment	Standard
Product status	Available

Light distribution

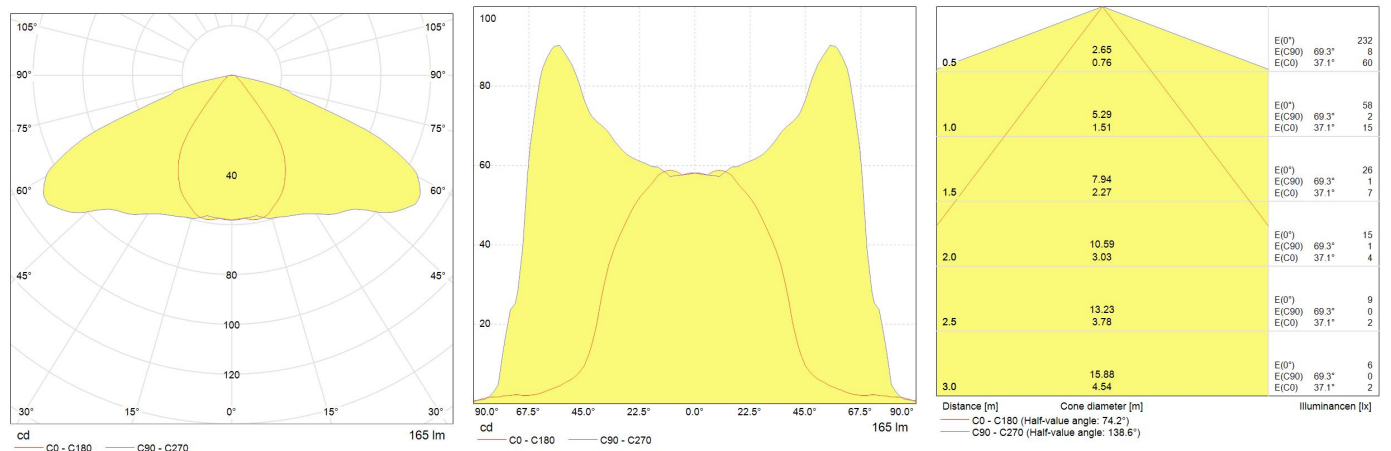

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Datasheet \(PDF\)](#)

[Installation guide \(PDF\)](#)

[Images \(HTTP\)](#)

[Declaration of Conformity \(PDF\)](#)